


# 2SA3350U

## PNP Silicon Epitaxial Planar Power Transistor



1.Base 2.Collector 3.Emitter  
SOT-89 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CB0}$	50	V
Collector Emitter Voltage	$-V_{CEO}$	50	V
Emitter Base Voltage	$-V_{EBO}$	6	V
Collector Current	$-I_C$	3	A
Collector Current ( $t_p = 300 \mu\text{s}$ )	$-I_{CP}$	6	A
Collector Power Dissipation	$P_C$	0.5 <sup>1)</sup> 1 <sup>2)</sup>	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance - Junction to Ambient	$R_{\theta JA}$	250 <sup>1)</sup> 125 <sup>2)</sup>	$^\circ\text{C/W}$

<sup>1)</sup> Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.


<sup>2)</sup> Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate in still air.



# 2SA3350U

## Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $-V_{CE} = 2\text{ V}$ , $-I_C = 0.5\text{ A}$ at $-V_{CE} = 2\text{ V}$ , $-I_C = 2\text{ A}$	$h_{FE}$ $h_{FE}$	120 40	- -	240 -	- -
Collector Base Cutoff Current at $-V_{CB} = 50\text{ V}$	$-I_{CBO}$	-	-	1	$\mu\text{A}$
Emitter Base Cutoff Current at $-V_{EB} = 6\text{ V}$	$-I_{EBO}$	-	-	1	$\mu\text{A}$
Collector Base Breakdown Voltage at $-I_C = 100\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	50	-	-	V
Collector Emitter Breakdown Voltage at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	50	-	-	V
Emitter Base Breakdown Voltage at $-I_E = 100\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	6	-	-	V
Collector Emitter Saturation Voltage at $-I_C = 1\text{ A}$ , $-I_B = 50\text{ mA}$	$-V_{CE(sat)}$	-	-	0.35	V
Base Emitter Saturation Voltage at $-I_C = 2\text{ A}$ , $-I_B = 100\text{ mA}$	$-V_{BE(sat)}$	-	-	1.2	V
Transition Frequency at $-V_{CE} = 10\text{ V}$ , $-I_C = 50\text{ mA}$	$f_T$	-	250	-	MHz
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$	$C_{ob}$	-	28	-	pF
Turn-on Time at $-V_{CC} = 30\text{ V}$ , $-I_{B1} = I_{B2} = 100\text{ mA}$	$t_{on}$	-	100	-	ns
Storage Time at $-V_{CC} = 30\text{ V}$ , $-I_{B1} = I_{B2} = 100\text{ mA}$	$t_{stg}$	-	300	-	ns
Fall Time at $-V_{CC} = 30\text{ V}$ , $-I_{B1} = I_{B2} = 100\text{ mA}$	$t_f$	-	50	-	ns



## Electrical Characteristics Curves

Fig. 1 Output Characteristics Curve

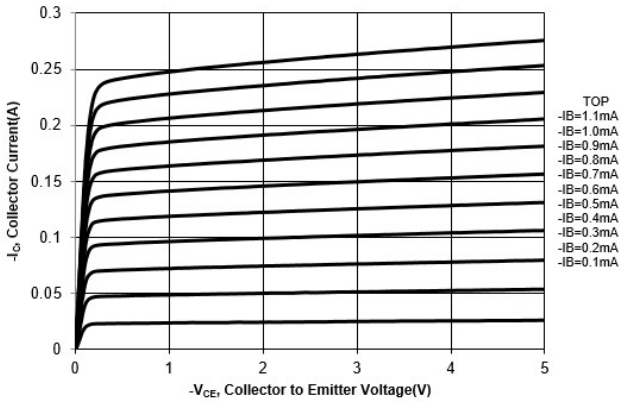


Fig. 2 Collector Current vs. Base to Emitter Voltage

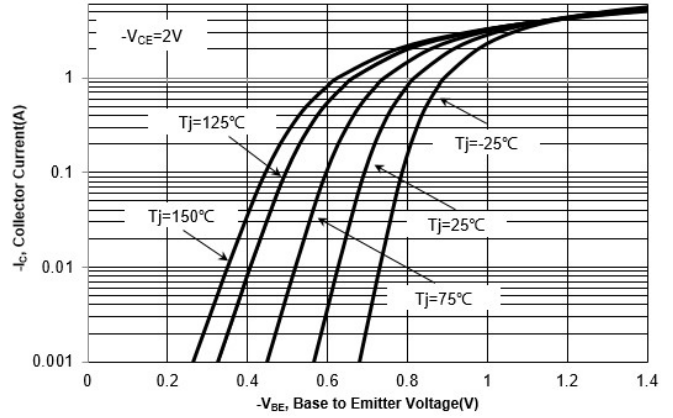


Fig. 3 DC Current Gain vs. Collector Current



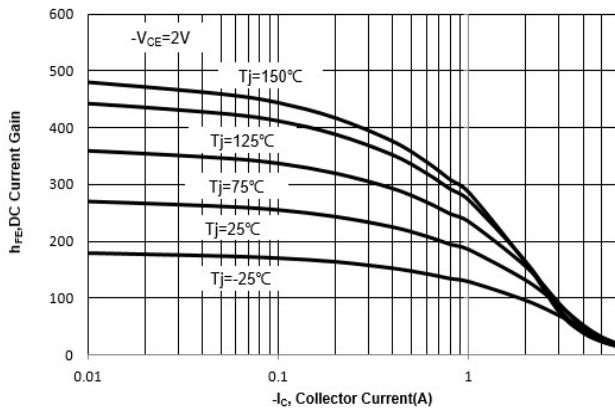


Fig. 4  $V_{BESAT}$  vs. Collector Current

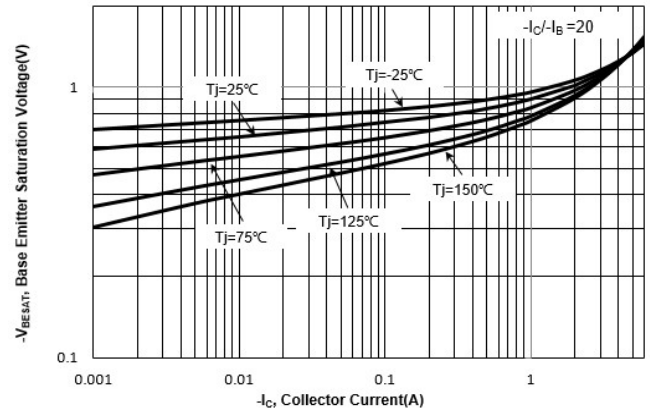

# 2SA3350U

## Electrical Characteristics Curves

Fig. 5  $V_{CESAT}$  vs. Collector Current

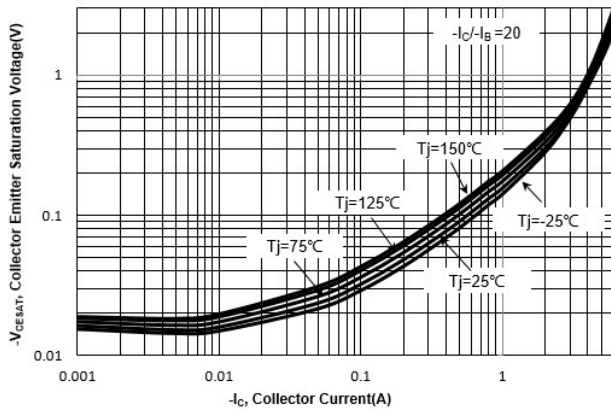


Fig. 6 Output Capacitance



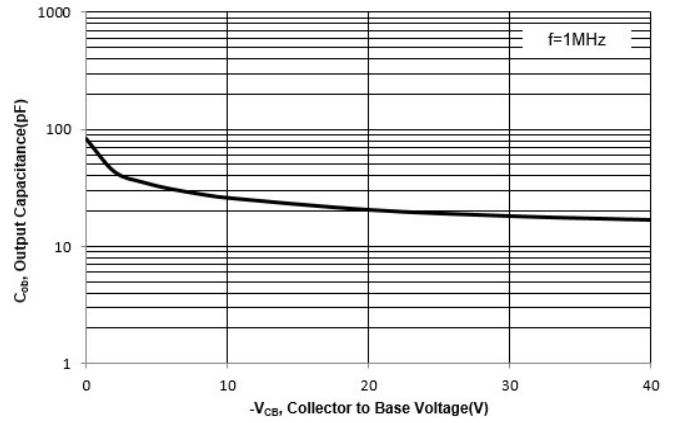



Fig. 7 Power Derating Curve

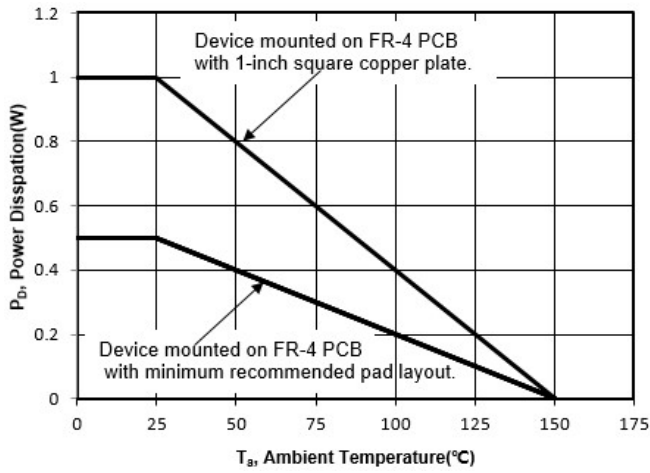

# 2SA3350U


## Package Outline (Dimensions in mm)

SOT-89

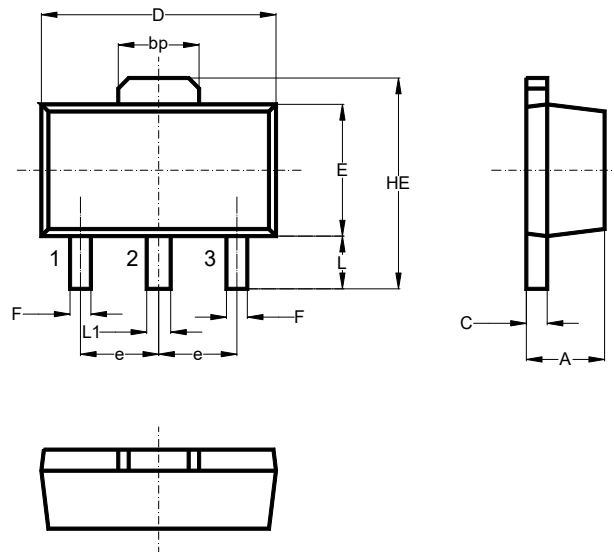

Unit	A	bp	C	D	E	F	HE	e	L	L1
mm	1.6	1.60	0.5	4.6	2.6	0.45	4.25	1.5	1.05	0.51
	1.4	1.50	0.3	4.4	2.4	0.35	3.75	typ.	0.95	0.41

## Recommended Soldering Footprint



## Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOT-89	12	8 ± 0.1	0.315 ± 0.004	178	7	1,000
				330	13	4,000

## Marking information

" 2SA3350U " = Part No.  
 "YM" = Date Code Marking  
 "Y" = Year  
 "M" = Month  
 Font type: Arial

