



ESDU0501DW

ESD Protection Diode

Features

- Excellent clamping capability
- Low leakage
- Fast response time

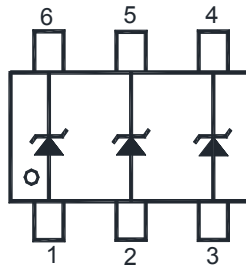

1. Anode 2. Anode 3. Anode
4. Cathode 5. Cathode 6. Cathode
SOT-363 Plastic package


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20 \mu\text{s}$)	P_{PK}	200	W
Peak Pulse Current ($t_p = 8/20 \mu\text{s}$)	I_{PP}	16	A
IEC61000-4-2 (ESD) Air Contact	V_{ESD}	± 20 ± 15	KV
Operation Junction Temperature Range	T_j	- 55 to + 125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V_{RWM}	-	-	5	V
Reverse Breakdown Voltage at $I_R = 1 \text{ mA}$	$V_{(BR)R}$	7	-	-	V
Reverse Current at $V_R = 5 \text{ V}$	I_R	-	-	1	μA
Forward Voltage at $I_F = 10 \text{ mA}$	V_F	-	-	0.9	V
Clamping Voltage at $I_{PP} = 5 \text{ A}$, $t_p = 8/20 \mu\text{s}$ at $I_{PP} = 16 \text{ A}$, $t_p = 8/20 \mu\text{s}$	V_C	-	-	9.8 12.5	V
ESD Clamping Voltage at $I_{TLP} = 4 \text{ A}$, $t_p = 0.2/100 \text{ ns}$ at $I_{TLP} = 16 \text{ A}$, $t_p = 0.2/100 \text{ ns}$	V_{CL}	-	9.6 11.4	-	V
Junction Capacitance at $V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_j	-	-	160	pF
Dynamic Resistance ¹⁾	R_{dyn}	-	0.15	-	Ω

¹⁾ Dynamic Resistance calculated from $I_{TLP} = 4 \text{ A}$ to $I_{TLP} = 16 \text{ A}$.



Electrical Characteristic Curves

Fig 1. Pulse Waveform

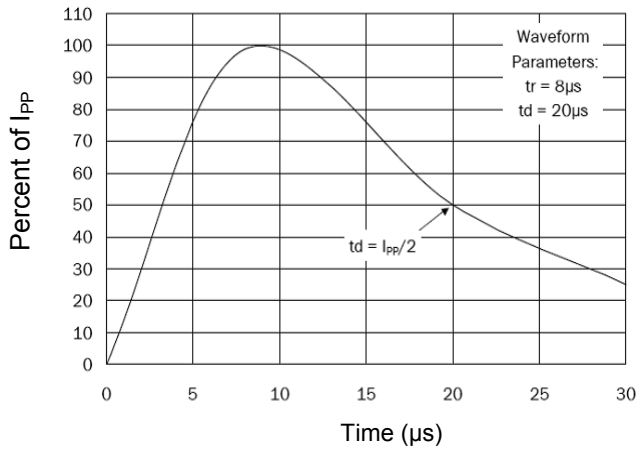


Fig 2. Power Derating Curve

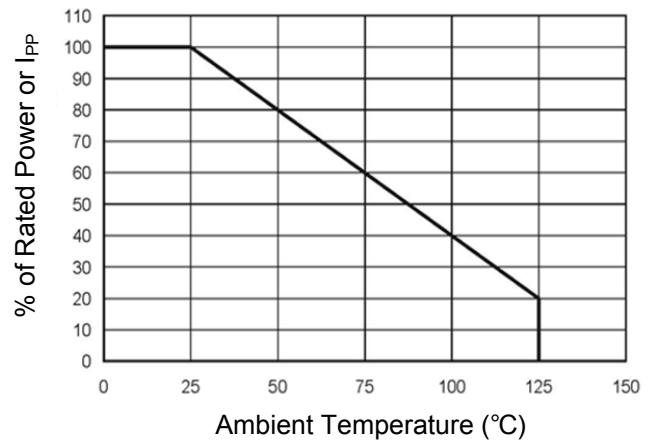


Fig 3. Clamping Voltage Curve

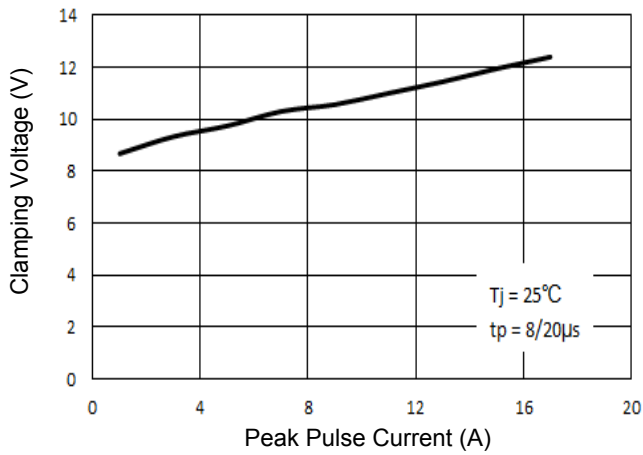


Fig 4. Junction Capacitance







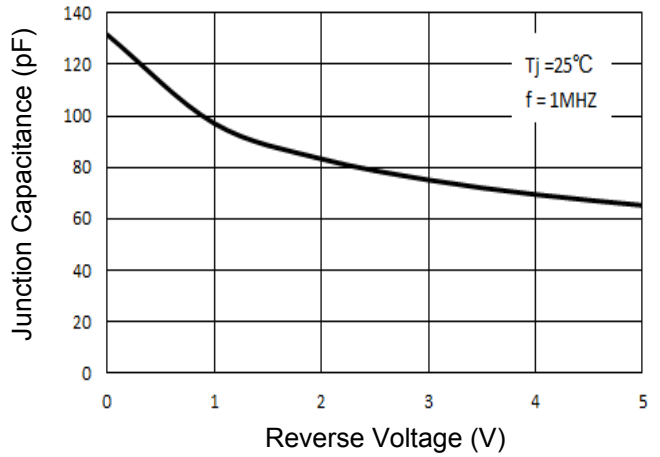


Fig 5 TLP Curve

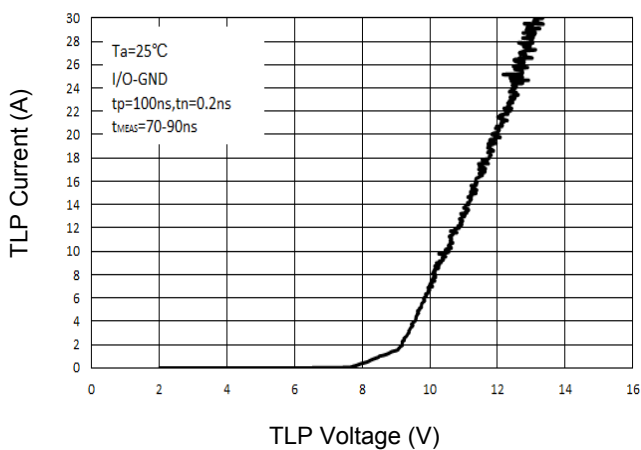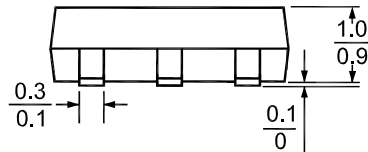

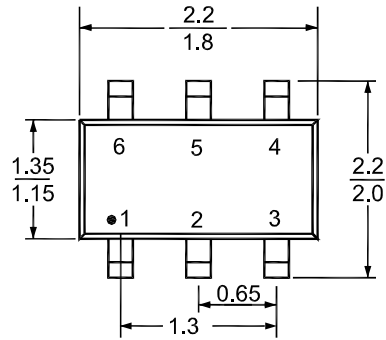

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOT-363	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" ED " = Part No.

"YM" = Date Code Marking

"Y" = Year

"M" = Month

Font type: Arial

