



MMFTP2101

P-Channel Enhancement Mode MOSFET

Features

- Surface-mounted package



1. Gate 2. Source 3. Drain
SOT-23 Plastic Package

Applications

- Portable appliances
- Battery management

Absolute Maximum Ratings (at $T_a = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	8	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current $t \leq 10$ s	$-I_D$	3.7	A
Pulsed Drain Current ¹⁾	$-I_{DM}$	11	A
Power Dissipation ²⁾ $t \leq 10$ s	P_D	960	mW
Operating Junction and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance - Junction to Ambient ²⁾ $t \leq 10$ s Steady State	$R_{\theta JA}$	130 160	$^\circ\text{C}/\text{W}$

¹⁾ Pulse Test: Pulse Width $\leq 100 \mu\text{s}$, Duty Cycle $\leq 2\%$, Repetitive rating, pulse width limited by junction temperature $T_{j(\text{MAX})} = 150^\circ\text{C}$.


²⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate.



MMFTP2101

Characteristics at $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit
STATIC PARAMETERS					
Drain-Source Breakdown Voltage at $-I_D = 250 \mu\text{A}$	$-BV_{DSS}$	8	-	-	V
Drain-Source Leakage Current at $-V_{DS} = 6.4 \text{ V}$	$-I_{DSS}$	-	-	1	μA
Gate Leakage Current at $V_{GS} = \pm 8 \text{ V}$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage at $V_{DS} = V_{GS}$, $-I_D = 250 \mu\text{A}$	$-V_{GS(th)}$	0.4	-	1	V
Drain-Source On-State Resistance at $-V_{GS} = 4.5 \text{ V}$, $-I_D = 3.5 \text{ A}$ at $-V_{GS} = 2.5 \text{ V}$, $-I_D = 3 \text{ A}$ at $-V_{GS} = 1.8 \text{ V}$, $-I_D = 2 \text{ A}$	$R_{DS(on)}$	-	-	52 72 120	m Ω
DYNAMIC PARAMETERS					
Forward Transconductance at $-V_{DS} = 5 \text{ V}$, $-I_D = 3.5 \text{ A}$	g_{fs}	-	8.3	-	S
Gate resistance at $V_{DS} = 0 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$	R_g	-	4.7	-	Ω
Input Capacitance at $-V_{DS} = 8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_{iss}	-	543	-	pF
Output Capacitance at $-V_{DS} = 8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_{oss}	-	97	-	pF
Reverse Transfer Capacitance at $-V_{DS} = 8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_{rss}	-	70	-	pF
Total Gate Charge at $-V_{GS} = 4.5 \text{ V}$, $-V_{DS} = 8 \text{ V}$, $-I_D = 3.5 \text{ A}$ at $-V_{GS} = 2.5 \text{ V}$, $-V_{DS} = 8 \text{ V}$, $-I_D = 3.5 \text{ A}$	Q_g	-	5.7 3.3	-	nC
Gate to Source Charge at $-V_{GS} = 4.5 \text{ V}$, $-V_{DS} = 8 \text{ V}$, $-I_D = 3.5 \text{ A}$	Q_{gs}	-	1.7	-	nC
Gate to Drain Charge at $-V_{GS} = 4.5 \text{ V}$, $-V_{DS} = 8 \text{ V}$, $-I_D = 3.5 \text{ A}$	Q_{gd}	-	1.6	-	nC
Turn-On Delay Time at $-V_{DD} = 8 \text{ V}$, $-V_{GS} = 10 \text{ V}$, $-I_D = 3.5 \text{ A}$, $R_g = 3.3 \Omega$	$t_{d(on)}$	-	7	-	ns
Turn-On Rise Time at $-V_{DD} = 8 \text{ V}$, $-V_{GS} = 10 \text{ V}$, $-I_D = 3.5 \text{ A}$, $R_g = 3.3 \Omega$	t_r	-	42	-	ns
Turn-Off Delay Time at $-V_{DD} = 8 \text{ V}$, $-V_{GS} = 10 \text{ V}$, $-I_D = 3.5 \text{ A}$, $R_g = 3.3 \Omega$	$t_{d(off)}$	-	10	-	ns
Turn-Off Fall Time at $-V_{DD} = 8 \text{ V}$, $-V_{GS} = 10 \text{ V}$, $-I_D = 3.5 \text{ A}$, $R_g = 3.3 \Omega$	t_f	-	7	-	ns
Body-Diode PARAMETERS					
Drain-Source Diode Forward Voltage at $-I_S = 1.2 \text{ A}$, $V_{GS} = 0 \text{ V}$	$-V_{SD}$	-	-	1.2	V
Body-Diode Continuous Current	$-I_S$	-	-	1.2	A
Body Diode Reverse Recovery Time at $-I_S = 3.5 \text{ A}$, $di/dt = 100 \text{ A} / \mu\text{s}$	t_{rr}	-	5.6	-	ns
Body Diode Reverse Recovery Charge at $-I_S = 3.5 \text{ A}$, $di/dt = 100 \text{ A} / \mu\text{s}$	Q_{rr}	-	0.6	-	nC



Electrical Characteristics Curves

Fig. 1 Typical Output Characteristics

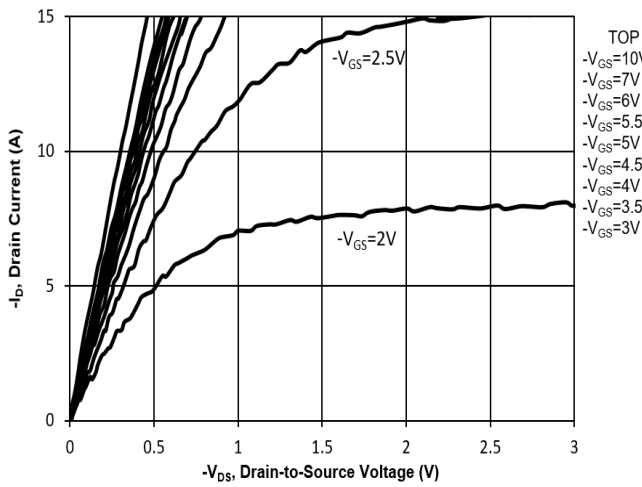


Fig. 2 Typical Transfer Characteristics

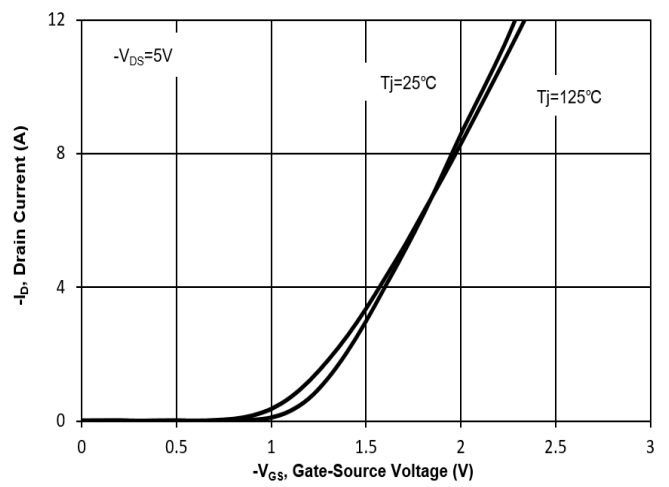


Fig. 3 On-Resistance vs. Drain Current

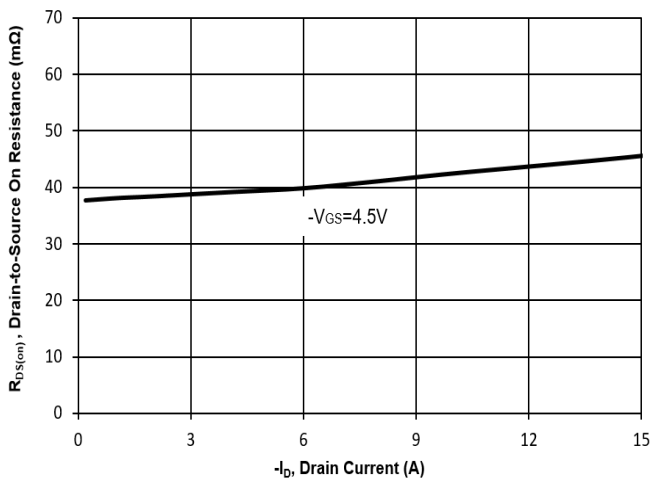


Fig. 4 On-Resistance vs. Gate-Source Voltage

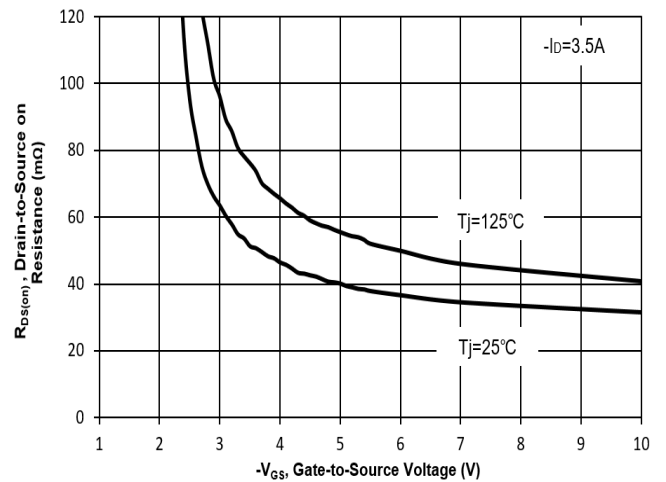


Fig. 5 On-Resistance vs. Tj



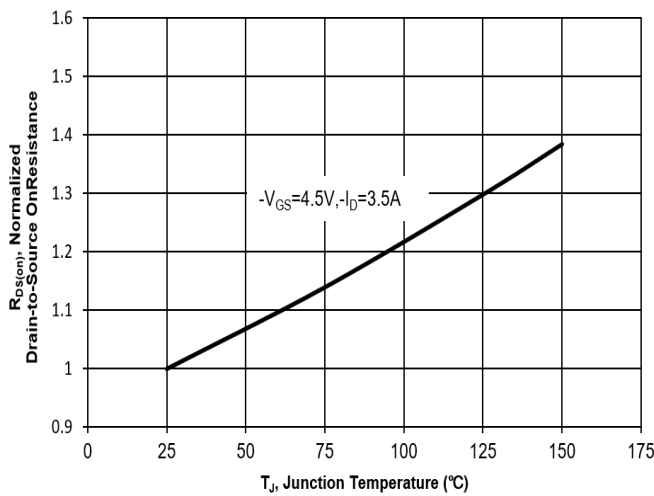


Fig. 6 Typical Body-Diode Forward Characteristics

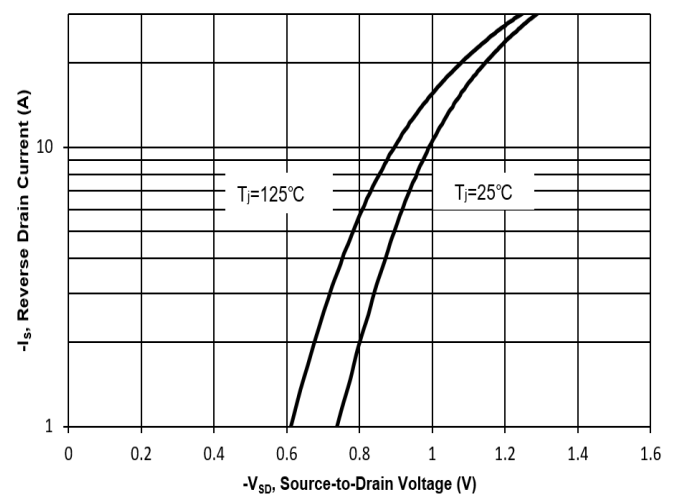

Electrical Characteristics Curves

Fig. 7 Typical Junction Capacitance

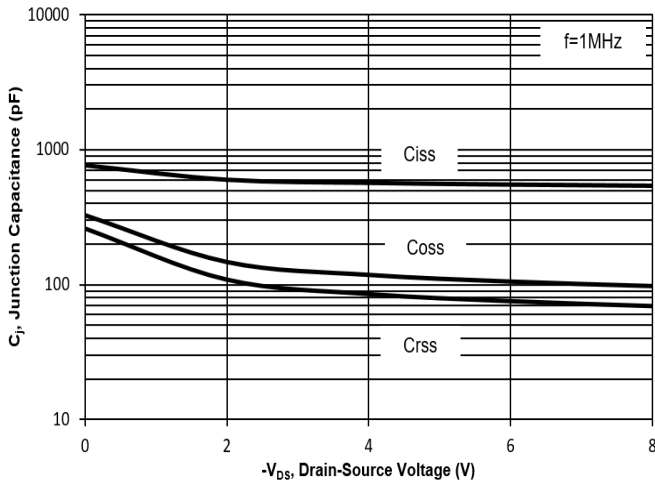


Fig. 8 Drain-Source Leakage Current vs. T_j

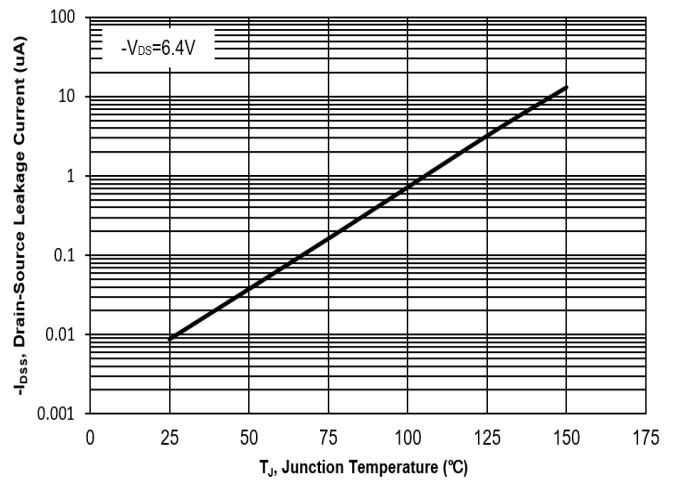


Fig. 9 V_{(BR)DSS} vs. Junction Temperature

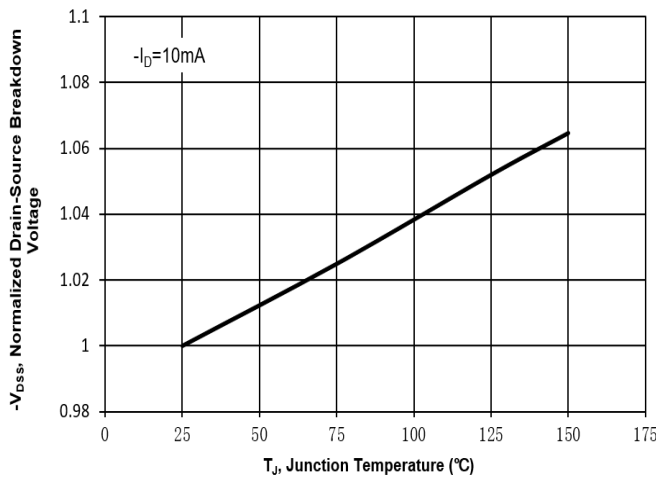


Fig. 10 Gate Threshold Variation vs. T_j



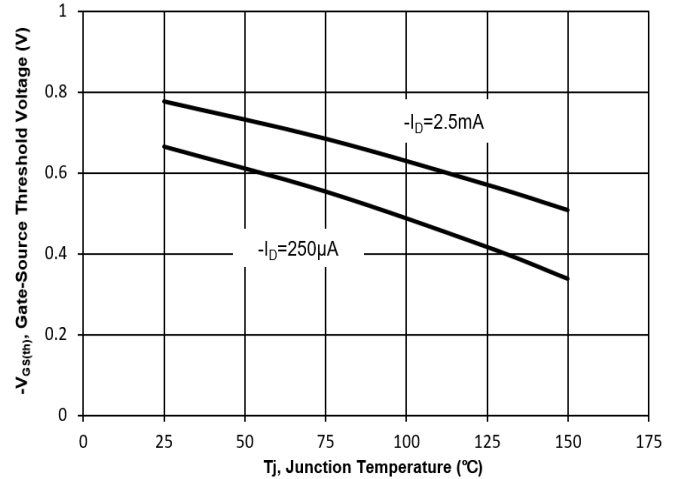


Fig. 11 Gate Charge

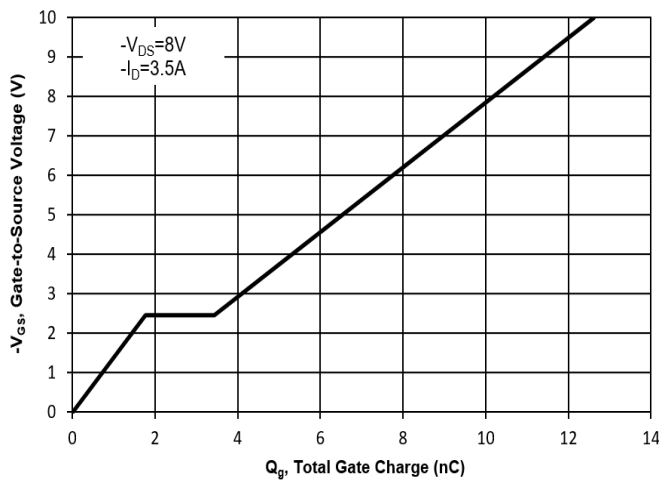

Test Circuits

Fig.1-1 Switching times test circuit

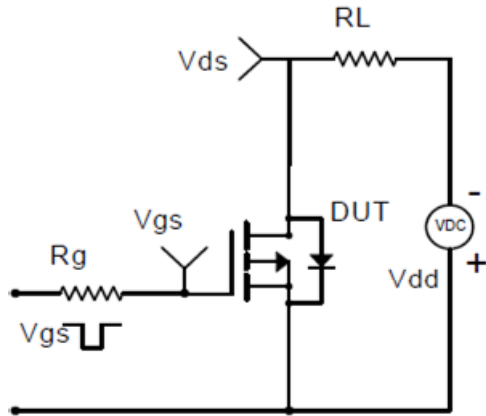


Fig.1-2 Switching Waveform

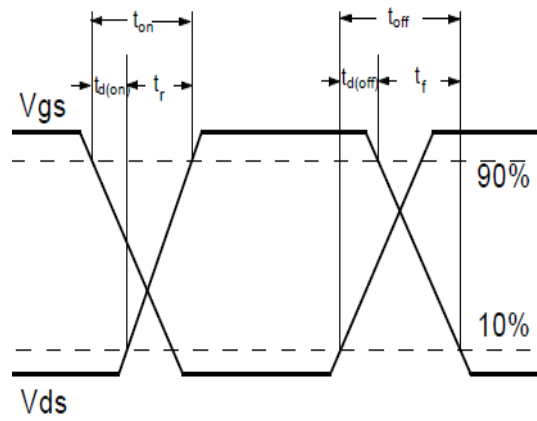


Fig.2-1 Gate charge test circuit



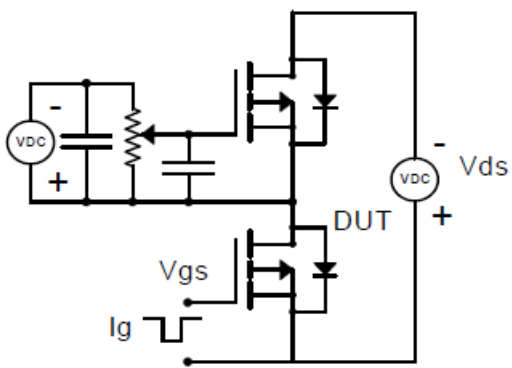



Fig.2-2 Gate charge waveform

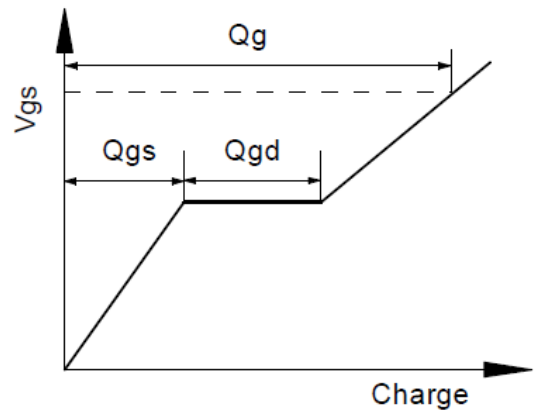

MMFTP2101


Package Outline (Dimensions in mm)

SOT-23

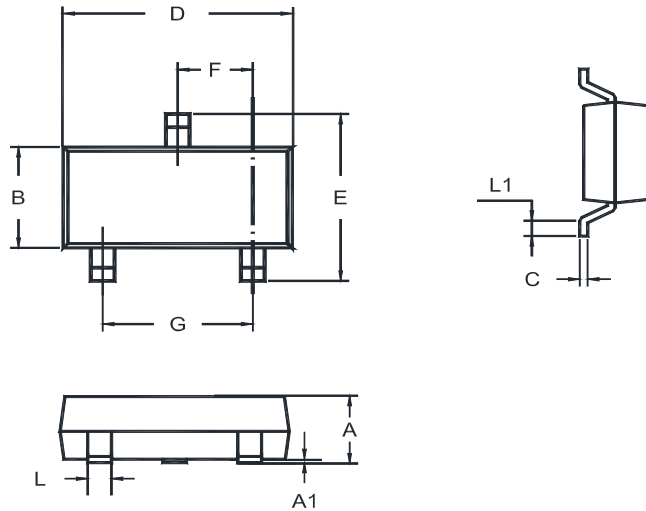

Unit	A	A1	B	C	D	E	F	G	L	L1
mm	1.20	0.100	1.40	0.19	3.04	2.6	1.02	2.04	0.51	0.2
	0.89	0.013	1.20	0.08	2.80	2.2	0.89	1.78	0.37	MIN

Recommended Soldering Footprint




Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOT-23	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" NG " = Part No.
 " YM " = Date Code Marking
 " Y " = Year
 " M " = Month
 Font type: Arial



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice. Semtech Electronics Limited makes no warranties, representations or warranties regarding the suitability of its products for any particular purpose, and does not accept any liability arising from the application or use of any product or circuit such as: Apply to medical, military, aircraft, space or life support equipment and expressly waive any and all liability, including but not limited to special, consequential or collateral damage.

