

SFW03H60S-AH

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 60 V


Forward Current - 3 A

Features

- Low forward voltage drop
- AEC-Q101 Qualified
- Easy pick and place
- Built-in strain relief
- Halogen and Antimony Free(HAF), RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

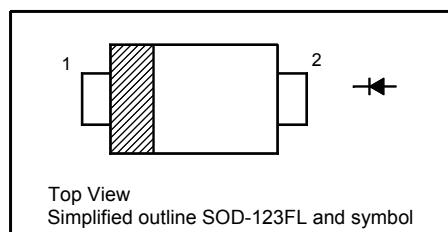

Applications

- Low voltage rectification
- High efficiency DC-to-DC conversion
- Switch mode power supply
- Freewheeling application

Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified, single phase, half wave, resistive or inductive load.


For capacitive load, derate by 20%

Parameter	Symbols	Value	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Maximum RMS Voltage	V_{RMS}	42	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load(JEDEC method)	I_{FSM}	60	A
Power Dissipation	P_{tot}	700	mW
Operating Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 150	°C

Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance from Junction to Ambient ¹⁾	$R_{\theta JA}$	178	°C/W


¹⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.



SFW03H60S-AH

Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 1 \text{ mA}$	$V_{(\text{BR})R}$	60	-	-	V
Forward Voltage at $I_F = 0.1 \text{ A}$ at $I_F = 0.5 \text{ A}$ at $I_F = 1 \text{ A}$ at $I_F = 2 \text{ A}$ at $I_F = 3 \text{ A}$	V_F	-	-	450	mV
		-	-	510	
		-	-	540	
		-	-	590	
		-	-	650	
Reverse Current at $V_R = 10 \text{ V}$ at $V_R = 40 \text{ V}$ at $V_R = 60 \text{ V}$	I_R	-	-	10	μA
Diode Capacitance at $V_R = 0 \text{ V}, f = 1 \text{ MHz}$ at $V_R = 10 \text{ V}, f = 1 \text{ MHz}$	C_d	-	580	-	
		-	180	-	
Reverse Recovery Time Step Recovery at $I_F = 0.5 \text{ A}, I_R = 1 \text{ A}, I_{rr} = 0.25 \text{ A}$	t_{rr}	-	17	-	ns



SFW03H60S-AH

Electrical Characteristics Curves

Fig 1. Reverse Characteristics Curve

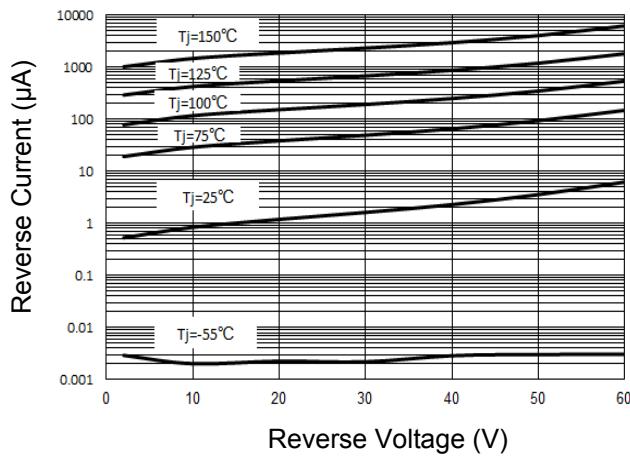


Fig 2. Forward Characteristics Curve

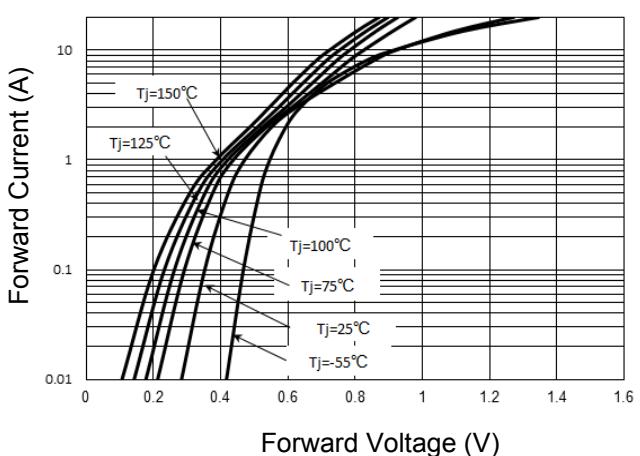


Fig 3. Junction Capacitance



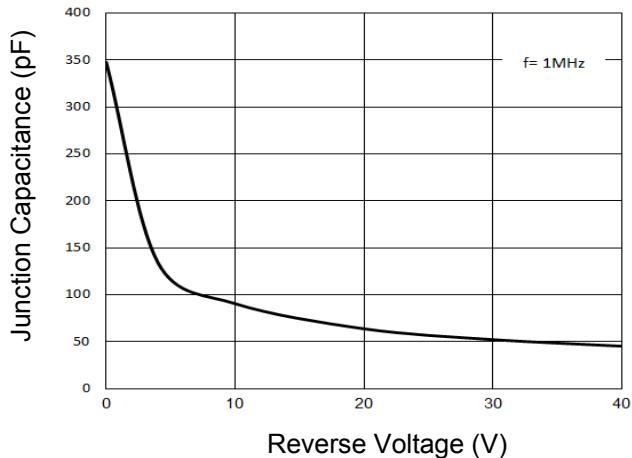


Fig 4. Average Rectified Current Derating Curve

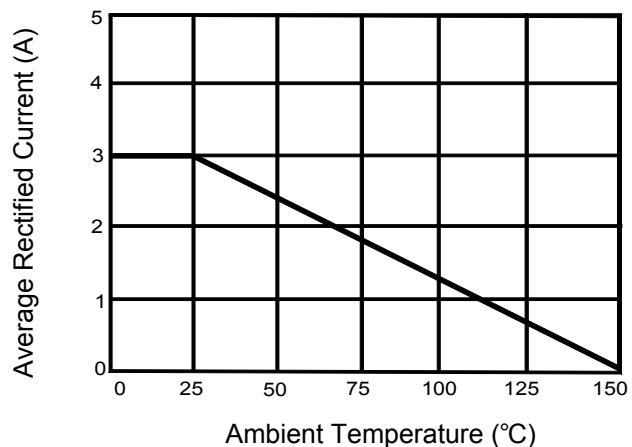


SFW03H60S-AH

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

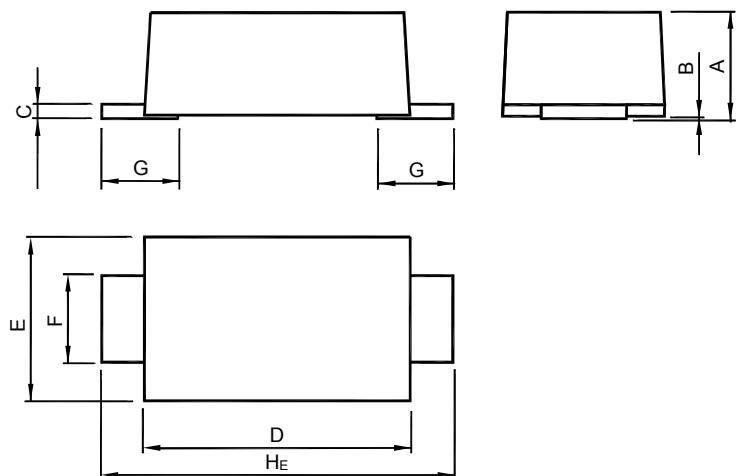

UNIT	A	B	C	D	E	F	G	H _E
mm	1.08	0.1	0.2	2.9	1.9	1.1	0.85	3.9
	0.88	0	0.1	2.7	1.7	0.8	0.45	3.5

Recommended Soldering Footprint

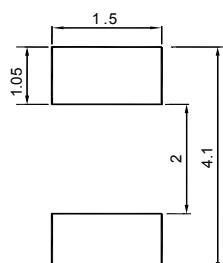

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" TT " = Part No.

" III " = Cathode line

" • " = HAF (Halogen and Antimony Free)

Font type: Arial

