


SMF5.0A~SMF220A

Surface Mount Transient Voltage Suppressors

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

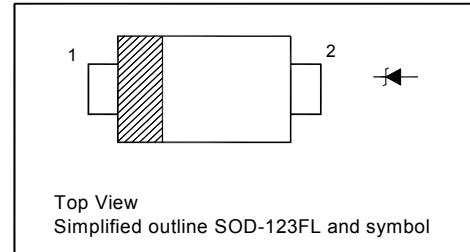

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation (PW-10/1000 μs) ¹⁾	P_{PPM}	200	W
Peak Forward Surge Current ²⁾	I_{FSM}	20	A
Operating Junction and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150	$^\circ\text{C}$


¹⁾ Non-repetitive current pulse at $T_a = 25^\circ\text{C}$, per waveform of Figure 1. Mounted on 5.0 mm² copper pads to each terminal.

²⁾ Peak Forward Surge Current 8.3 ms Single Half Sine -Wave, or equivalent square wave, duty cycle = 4 pulses per minutes maximum.

Thermal Characteristics

Parameter	Symbol	Value	Unit
Typical Thermal Resistance - Junction to Ambient ¹⁾	$R_{\theta JA}$	325	$^\circ\text{C/W}$


¹⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.



SMF5.0A~SMF220A

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified) $V_F < 1.25\text{ V}$ at $I_F = 200\text{ mA}$


Type	Marking Code	Stand-off Voltage V_{WM} (V)	Breakdown Voltage		Test Current I_T (mA)	Maximum Reverse Leakage I_R (μA) at V_{WM}	Maximum Clamping Voltage V_C (V) at I_{PPM}	Maximum Peak Pulse Current I_{PPM} (A)
			V_{BR} (V) Min. at I_T	V_{BR} (V) Max. at I_T				
SMF5.0A	TA1	5	6.4	7	10	400	9.2	21.7
SMF6.0A	TB1	6	6.7	7.4	10	400	10.3	19.4
SMF6.5A	TC1	6.5	7.2	8	10	250	11.2	17.9
SMF7.0A	TD1	7	7.8	8.6	10	100	12	16.7
SMF7.5A	TE1	7.5	8.3	9.2	1	50	12.9	15.5
SMF8.0A	TF1	8	8.9	9.8	1	25	13.6	14.7
SMF8.5A	TG1	8.5	9.4	10.4	1	10	14.4	13.9
SMF9.0A	TH1	9	10	11.1	1	5	15.4	13
SMF10A	TJ1	10	11.1	12.3	1	2.5	17	11.8
SMF11A	TK1	11	12.2	13.5	1	2.5	18.2	11
SMF12A	TL1	12	13.3	14.7	1	2.5	19.9	10.1
SMF13A	TM1	13	14.4	15.9	1	1	21.5	9.3
SMF14A	TN1	14	15.6	17.2	1	1	23.2	8.6
SMF15A	TP1	15	16.7	18.5	1	1	24.4	8.2
SMF16A	TQ1	16	17.8	19.7	1	1	26	7.7
SMF17A	TR1	17	18.9	20.9	1	1	27.6	7.2
SMF18A	TS1	18	20	22.1	1	1	29.2	6.8
SMF20A	TT1	20	22.2	24.5	1	1	32.4	6.2
SMF22A	TU1	22	24.4	26.9	1	1	35.5	5.6
SMF24A	TV1	24	26.7	29.5	1	1	38.9	5.1
SMF26A	TW1	26	28.9	31.9	1	1	42.1	4.8
SMF28A	TX1	28	31.1	34.4	1	1	45.4	4.4
SMF30A	TY1	30	33.3	36.8	1	1	48.4	4.1
SMF33A	TZ1	33	36.7	40.6	1	1	53.3	3.8
SMF36A	UA1	36	40	44.2	1	1	58.1	3.4
SMF40A	UB1	40	44.4	49.1	1	1	64.5	3.1
SMF43A	UC1	43	47.8	52.8	1	1	69.4	2.9
SMF45A	UD1	45	50	55.3	1	1	72.7	2.8
SMF48A	UE1	48	53.3	58.9	1	1	77.4	2.6
SMF51A	UF1	51	56.7	62.7	1	1	82.4	2.4
SMF54A	UG1	54	60	66.3	1	1	87.1	2.3
SMF58A	UH1	58	64.4	71.2	1	1	93.6	2.1
SMF60A	UJ1	60	66.7	73.7	1	1	96.8	1.8
SMF64A	UK1	64	71.1	78.6	1	1	103	1.7
SMF70A	UL1	70	77.8	86	1	1	113	1.5
SMF75A	UM1	75	83.3	92.1	1	1	121	1.4
SMF78A	UN1	78	86.7	95.8	1	1	126	1.4
SMF85A	UP1	85	94.4	104	1	1	137	1.3



SMF5.0A~SMF220A

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified) $V_F < 1.25\text{ V}$ at $I_F = 200\text{ mA}$

Type	Marking Code	Stand-off Voltage V_{WM} (V)	Breakdown Voltage		Test Current I_T (mA)	Maximum Reverse Leakage I_R (μA) at V_{WM}	Maximum Clamping Voltage V_C (V) at I_{PPM}	Maximum Peak Pulse Current I_{PPM} (A)
			V_{BR} (V) Min. at I_T	V_{BR} (V) Max. at I_T				
SMF90A	UQ1	90	100	111	1	1	146	1.2
SMF100A	UR1	100	111	123	1	1	162	1.1
SMF110A	US1	110	122	135	1	1	177	1
SMF120A	UT1	120	133	147	1	1	193	0.9
SMF130A	UU1	130	144	159	1	1	209	0.8
SMF150A	UV1	150	167	185	1	1	243	0.7
SMF160A	UW1	160	178	197	1	1	259	0.7
SMF170A	UX1	170	189	209	1	1	275	0.6
SMF175A	UY1	175	198	214	1	1	284	0.6
SMF180A	UZ1	180	201	222	1	1	292	0.5
SMF190A	VA1	190	211	232	1	1	308	0.5
SMF200A	VB1	200	224	247	1	1	324	0.5
SMF220A	VC1	220	246	272	1	1	356	0.5



SMF5.0A~SMF220A

Electrical Characteristics Curves

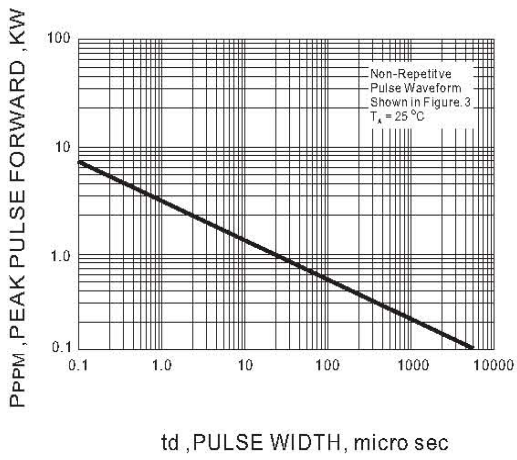


Fig.1 Peak pulse power rating curve

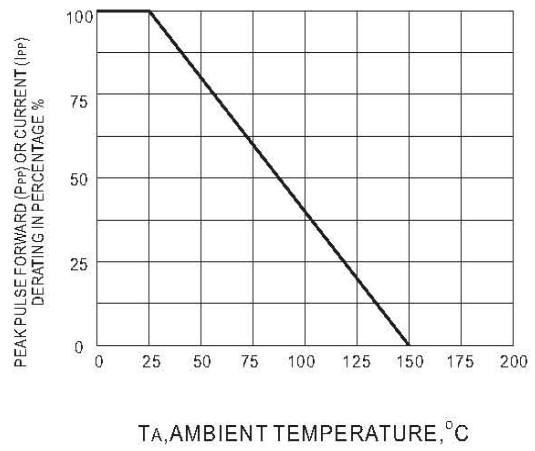


Fig.2 Derating curve


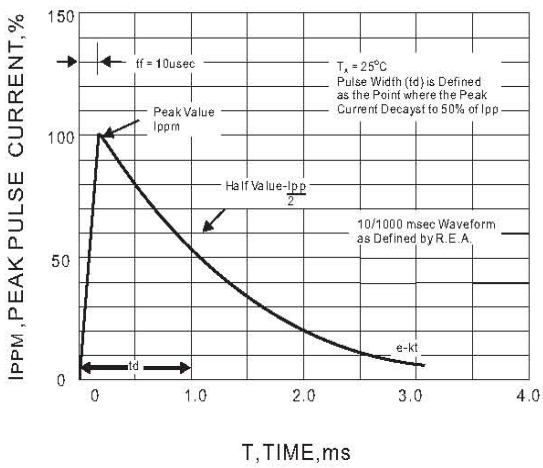


Fig.3 Pulse waveform




SMF5.0A~SMF220A

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

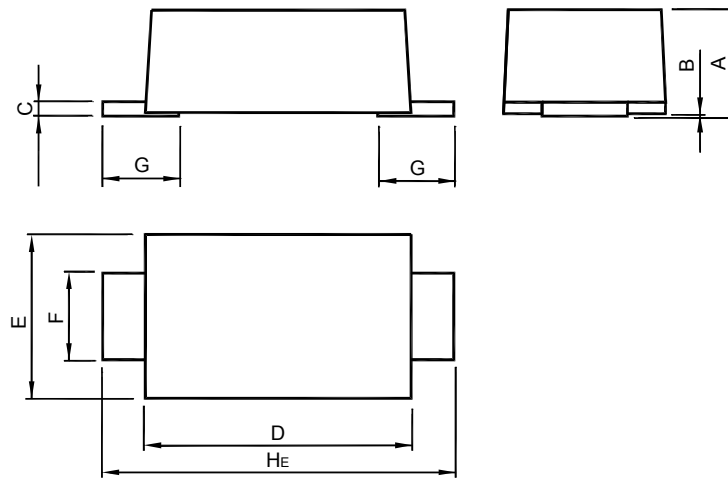

UNIT	A	B	C	D	E	F	G	H _E
mm	1.08 0.88	0.1 0	0.2 0.1	2.9 2.7	1.9 1.7	1.1 0.8	0.85 0.45	3.9 3.5

Recommended Soldering Footprint



Packing information


Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" *** " = Part No.

" III " = Cathode line

Font type: Arial



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice. Semtech Electronics Limited makes no warranties, representations or warranties regarding the suitability of its products for any particular purpose, and does not accept any liability arising from the application or use of any product or circuit such as: Apply to medical, military, aircraft, space or life support equipment and expressly waive any and all liability, including but not limited to special, consequential or collateral damage.

